

GIGABIT CABLE MODEM

Intel® Puma™ 7 2x2 OFDM

DOCSIS 3.0 32x8 channel bonding

DOCSIS 3.1 2x2 Multi-carrier OFDM

Supports IPv4 and IPv6



HIGH-PERFORMANCE, ALWAYS-ON INTERNET CONNECTION


The CODA-45 is the perfect choice for cable operators who want to offer high-speed and economic broadband access to their customer base. It delivers speeds up to 1.97Gbps based on 2 GigE ports with two bonded downstream channels over its DOCSIS interface. The CODA-45 allows MSOs to offer their customers various broadband applications such as telecommuting, HD and UHD video on demand over IP connectivity to a small office/home office (SOHO), high-speed residential Internet access, interactive multimedia services, etc. The CODA-45 is an intelligent device that enhances its basic data transmission features with IPv6 support, which makes it especially suitable for the transmission of data based on this protocol.

FAST, SIMPLE DEPLOYMENT, MONITORING AND MANAGEMENT

Installation of the CODA-45 is quick, straight-forward, and can be carried out by the end-user. Once connected, the built-in TFTP client automatically gets the IP address and configuration data from the network server without human intervention. A browser-based utility allows convenient viewing of key network statistics and SNMP support provides total remote control over the device.

KEY FEATURES

- DOCSIS 3.0 compliant and DOCSIS 3.0 certified
- DOCSIS 3.1 compliant and DOCSIS 3.1 certified
- Supports Business Services over DOCSIS
- Full-featured, high bandwidth cable modem
- Built in MoCA® immunity filter
- Extensive operator control via configuration file and SNMP
- Well-defined LEDs clearly display device and network status

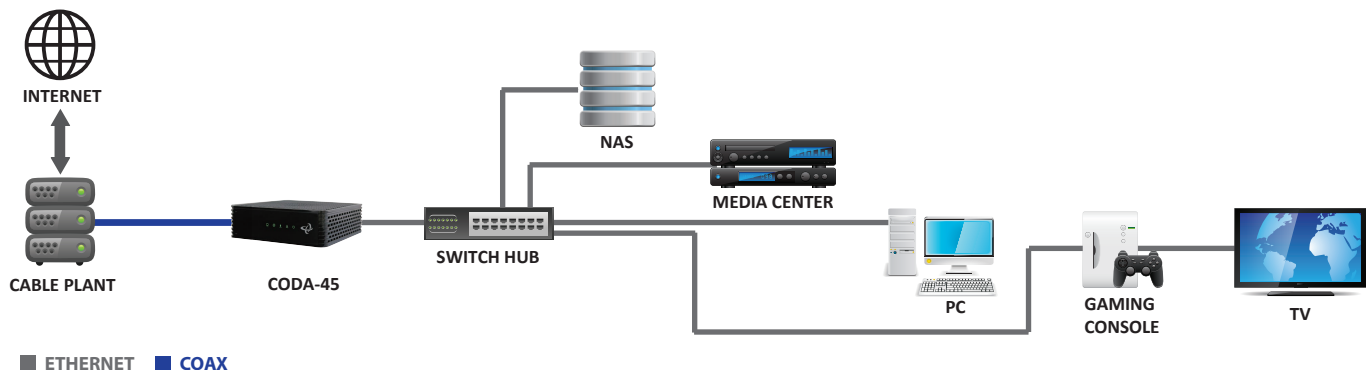

SPECIFICATIONS

Protocol Support

- DOCSIS 2.0/3.0/3.1
- SNMP v1, v2C, v3
- DHCP, TFTP and ToD clients (IPv4/IPv6)
- L2VPN

Connectivity

- RF F-type female 75Ω connector
- 2x RJ-45 Ethernet port 10/100/1000 Mbps (Auto-MDI/MDIX)

Management

- Web-based GUI control configuration and management
- Dual-color LEDs clearly display network status and activity
- Power on self diagnostic
- MIB II/MCNS MIB
- Hitron proprietary MIBs for extended support

Reception-Demodulation

- DOCSIS 3.0 Demodulation: 64QAM, 256QAM
- DOCSIS 3.0 Data rate: Up to 1.2Gbps with 32 bonded downstream channels
- DOCSIS 3.1 Demodulation: Multi-carrier OFDM 16 to 4096QAM
- DOCSIS 3.1 Data rate: Up to 1.97Gbps with 2 OFDM 192MHz downstream channels
- Frequency (edge-to-edge): 108 ~ 1002 MHz
- Channel Bandwidth: 6 MHz
- Signal Level: -15 dBmV to 15 dBmV
- Input return loss: >6dB

Transmitter-Modulation

- DOCSIS 3.0 Modulation: QPSK, 8QAM, 16QAM, 32QAM, 64QAM, and 128QAM (SCDMA only)
- DOCSIS 3.0 Data rate up to 320 Mbps with 8 upstream channel bonding
- DOCSIS 3.1 Modulation: Multi-carrier OFDMA BPSK to 4096QAM
- DOCSIS 3.1 Data rate up to 720Mbps with 1 OFDMA 96MHz upstream channels
- Frequency: 5 ~ 85 MHz
- Upstream transmit Signal Level: +11 to 65 dBmV
- Output return loss: >6dB

Mechanical

- 5 status LEDs (Power, DS, US, Status, LAN)
- Factory default reset button
- Dimensions: 171mm (W) x 185mm (H) x 52mm (D)
- Weight: 464g ± 10g

Environmental

- Power Adaptor: 12V 2A
- Power Consumption: 15W (typical)
- Operating Temperature: 32°F (0°C) to 104°F (40°C)
- Operating Humidity: 10% ~ 90% (Non- condensing)
- Storage Temperature: -40°F (-40°C) to 140°F (60°C)
- Surge Protection:
 - RF input sustains at least 4KV
 - Ethernet RJ-45 sustains at least 4KV

Compliance Certificates

- RoHS Compliant
- FCC, UL, IC