




DOCSIS 3.0 Cable Gateway with Wi-Fi 5 and Voice

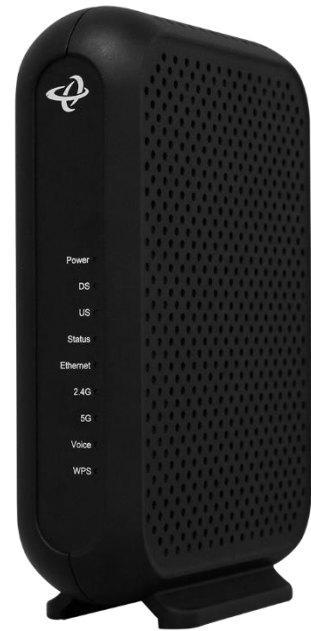

CGNV5-PRO


CGNV5-PRO has the capacity to receive 960Mbps over its DOCSIS/EuroDOCSIS 3.0 interface with twenty-four bonded channels. The integrated 3x3 802.11n + 4x4 802.11ac dual band MIMO access point significantly improves customer experience extending range and coverage with blazing speeds up to Giga speed.

 DOCSIS 3.0 Delivers 8x faster speeds than DOCSIS 2.0	 GigE Two Gigabit Ethernet Ports	 Two HD Voice Ports
 High-performance Wi-Fi networking	 Enhanced smart home experience with HitronCloud support <small>Advanced feature</small>	

Key Features

- DOCSIS/EuroDOCSIS 3.0 compliant
- Wi-Fi Access Point with 3x3 802.11n + 4x4 802.11ac dual band MIMO internal antennas
- Extensive operator control via configuration file and SNMP
- Well-defined LEDs clearly display device and network status
- TR-069 for easy setup and remote management
- Enhanced management and stability for low total cost of ownership
- 2x FXS for telephony using SIP
- Optional HitronCloud home network management support

Application

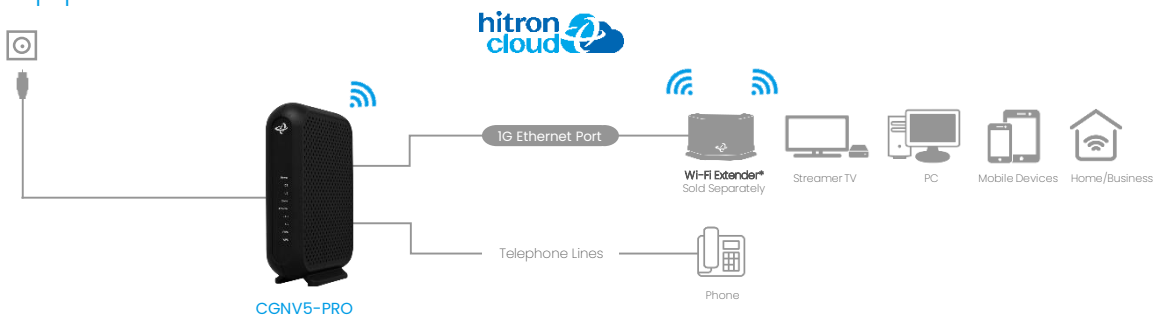

Specifications

CGNV5-PRO

Reception-Demodulation

- Demodulation: 64QAM, 256QAM
- Data Rate: Up to 960Mbps/1.3G with 24 bonded downstream channels (DOCSIS/EuroDOCSIS)
- Frequency (edge-to-edge): 108 ~ 1002 MHz
- Channel Bandwidth: 6 MHz/8MHz (DOCSIS, DOCSIS-J/EuroDOCSIS)
- Signal Level: -15 dBmV to 15 dBmV

Transmitter-Modulation

- Modulation: QPSK, 8QAM, 16QAM, 32QAM, 64QAM, and 128QAM (SCDMA only)
- Data rate up to 240 Mbps with 8 upstream channel bonding
- Frequency: 5 ~ 85 MHz

Wi-Fi

- 3x3 802.11n + 4x4 802.11ac
- 3T3R 2.4GHz (2412MHz-2462MHz) 11n+4T4R 5GHz
- (5180MHz-5240MHz) 11ac dual band with 450Mbps+1733Mbps PHY data rate
- 20/40/80 MHz channel bandwidth
- Up to 8 SSIDs for each frequency
- Security: WEP-64/WEP-128, WPA-PSK/WPA2-PSK (TKIP/AES)
- QoS: WMM/WMM-PS
- WPS (Wi-Fi Protected Setup) PBC, PIN

Routing Support

- MAC address filtering (IPv4/IPv6)
- IP source/destination address filtering (IPv4/IPv6)
- DHCP, TFTP and ToD clients (IPv4/IPv6)
- DHCP server supports RFC 1541 (IPv4)
- DHCPv6 obtains prefix from DHCPv6 server through prefix delegation
- Firewall with stateful inspection (IPv4/IPv6)
- Hacker Intrusion prevention and detection
- Application content filtering (IPv4/IPv6)
- VPN Termination and pass through (IPv4/IPv6)
- Complete NAT software implemented as per RFC 1631 with port and address mapping (IPv4)

Protocol Support

- DOCSIS 3.0/2.0/1.1 with EuroDOCSIS compliant
- PacketCable L5
- SNMP v1, v2C, v3
- IGMP
- TR-069/ 181
- SIP & MGCP

Management

- Web-based GUI control configuration and management
- Easy-to-read LEDs clearly display network status and activity
- Power on self diagnostic
- Hitron proprietary MIBs for extended support on:
 - DOCSIS/EuroDOCSIS
 - Router Management
 - Wi-Fi Management

Interfaces

- RF F-type female 75Ω connector
- 4x RJ-45 Ethernet port 10/100/1000 Mbps
- 2x FXS RJ-11 telephony port
- USB 3.0 type A connector with host interface

Mechanical

- 9 status LEDs (Power, DS, US, Status, Ethernet, 2.4G, 5G, Voice, WPS)
- Factory reset button
- Dimensions: 213.2mm (W) x 243mm (H) x 70mm (D)(including stand and RF connector)
- Weight: 570g ± 30g

Environmental

- Power: 12 VDC, 2.5A
- Power Consumption: 1W (standby), 16W (operation)
- Operating Temperature: 0°C (32°F) ~ 40°C (104°F)
- Operating Humidity: 10% ~ 90% (Non-condensing)
- Storage Temperature: -40°C (-40°F) ~ 70°C (158°F)
- Surge Protection: RF input sustains at least 4.5KV, Ethernet RJ-45 sustains at least 4KV

Regulatory Compliance

- RoHS Compliant
- FCC
- UL
- CE



Specifications subject to change without further notice. Product photo may differ.
Trademarks owned by Hitron Technologies Inc. © 2021 Hitron Technologies Inc. All rights reserved.