



GPON

with Wi-Fi 6 and Voice HGU

NOVA-1214



The NOVA-1214 is a powerful ONU solution to provide high-speed Internet access for residential and business customers. Its 4 Giga ports delivers speed up to 2.48Gbps downstream / 1.24Gbps upstream based on 2.5 Gigabit GPON fiber interface.


 2.5G PON ITU-TG.984.x GPON Compliant	 1GigE Ethernet Port	 HD Voice Port *Optional
 Powered up with Wi-Fi 6 speeds up to 9.6Gbps		

Advanced feature

Key Features

- ITU-TG.984.x GPON Compliant
- Wi-Fi 2x2 5GHz 802.11 ax and 2x2 2.4GHz 802.11ax dual band concurrent internal antennas
- 16 SSIDs (8 SSIDs per radio)
- Individual configuration for each SSID (security, bridging, routing, firewall and Wi-Fi parameters)
- 4 100/1000Mbps BASE-T Ethernet port
- 2 FXS port

Application

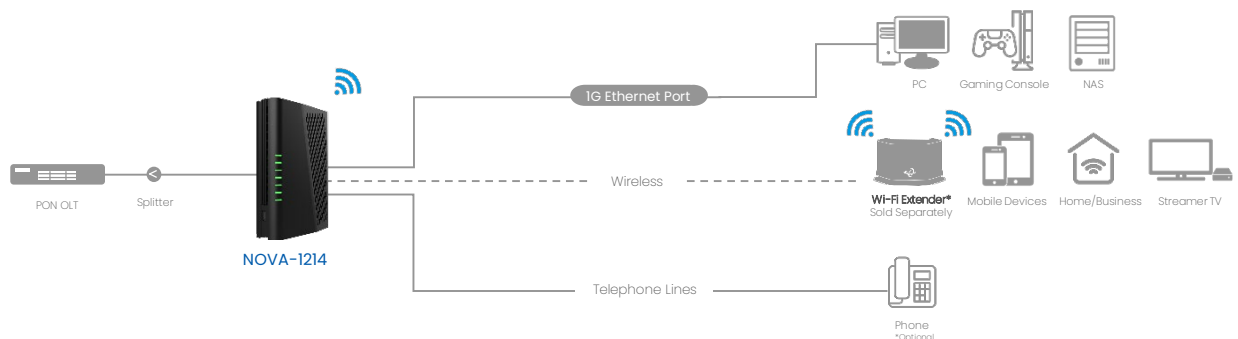

Specifications

NOVA-1214

xPON Uplink

- ITU-TG.984.4 OMC1
- 1x SC/APC Connector, Single Mode Fiber
 - TX Wavelength: 1260 nm
 - ODN Class C
 - Launched power 2-7dBm
- RX wavelength: 1480 nm
- ODN Class C
- Minimum Sensitivity -27dBm
- Minimum Overload -8 dBm

Wireless

- 802.11a/b/g/n/ac/ax
- 2T2R 2.4GHz (2412MHz-2462MHz) 802.11ax MU-MIMO + 2T2R 5GHz (5180MHz-5240MHz) 802.11ax dual band concurrent with 574Mbps+2402Mbps PHY data rate
- 20/40/80/160MHz channel bandwidth
- Up to 8 SSIDs for each frequency
- Security: WEP-64/WEP-128, WPA-PSK/WPA2-PSK (TKIP/AES), WAPI, WPA3-PSK
- QoS: WMM/WMM-PS
- WPS (Wi-Fi Protected Setup) PBC, PIN
- Fast roaming: 802.11r/k/v and Band Steering (BS)

Voice (NOVA-1214)

- Protocol support: SIP & IMS
- Codec G.711 G.729
- RTP, RTCP

Routing Support

- Protocol support: IGMP v3 for IPTV service capability
- MAC address filtering IP source/destination address filtering
- DHCP, TFTP and ToD clients
- DHCP server supports RFC 1541
- Firewall with stateful inspection
- Hacker intrusion prevention and detection
- Application content filtering
- Complete NAT software implemented as per RFC 1631 with port and address mapping

Interfaces

- 1x SC/APC optical port 1.25G/2.5G
- 4x RJ-45 10/100/1000 BASE-T
- 2x RJ-11 FXS
- 1x DC 12V Power Jack
- 1x USB 2.0

Management

- IEEE 802.3ah OAM
- Web-based GUI configuration and management
- LEDs clearly display network status and activity
- Power On Self-Diagnostic

Mechanical

- LEDs: Power, Alarm, GPON, WiFi, Phone, WPS and USB
- WPS button
- Factory default reset button
- Dimensions: 58mm(W)x196mm(H)x130mm(D)
- Net weight: 502g

Electrical

- Input Power: 12VDC
- Power Consumption: <28W
- Surge Protection: Ethernet RJ-45 sustains 1KV

Environmental

- Operating Temperature: 0°C (-32°F) ~ 45°C (113°F)
- Operating Humidity: 0% ~ 90% (Non condensing)
- Storage Temperature: -40°C (-40°F) ~ 80°C (176°F)

Models

- NOVA-1214: GPON WiFi 6 HGU with FXS
- NOVA-1210: GPON WiFi 6 HGU

Regulatory Compliance (Planned)

- RoHS compliant



*2.5Gbps are theoretical speeds. Speeds measured in laboratory settings are 2.48 Gbps downstream and 1.24 Gbps upstream. Specifications subject to change without further notice. Product photo may differ.

Trademarks owned by Hitron Technologies Inc. © 2022 Hitron Technologies Inc. All rights reserved.